




NAMI®

Pallet truck/Standard Integral-type pump

- 1.High reliability, suitable for variety of environments.It can be used for 3-5 years under normal maintenance
- 2.The first design of forging & casting integral pump, which prevents any loosening and leakage.
- 3.High-strength alloy steel carefully rafted, increased loading capacity
- 4.Set the active safety valve to prevent over loading of operation
- 5.Option: rubber wheel,Polyurethane wheel
double(Nylon,polyurethane) wheel

Model		CBY20-II	CBY25-II	CBY30-II
Load capacity	kg	2000	2500	3000
Lift height	mm	190/200		
Min. Height	mm	75/85		
Outside fork spread	mm	520/540/685		
Fork length	mm	800/900/1000/1100/1150/1220		
Overall length	mm	1230/1330/1430/1530/1580/1650		
Steering Wheel	mm	Φ180×50/Φ200×50		
Load wheel	mm	Φ80×70/Φ74×70		
Turning radius	mm	1250		
Standard wheel	mm	single Nylon wheel		

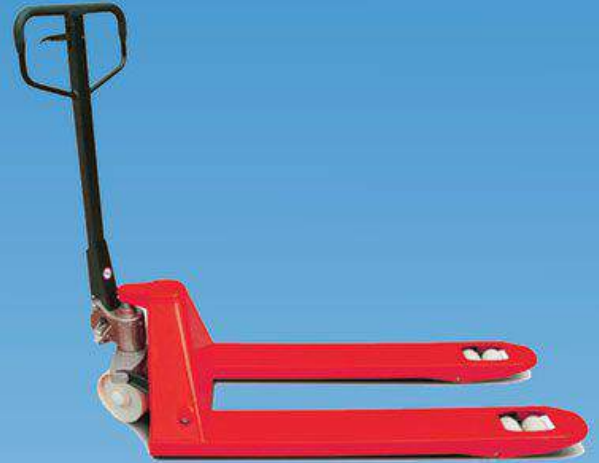

Pallet truck/Standard

Welding pump with leaking proof design

- 1.With overloading safety valve
- 2.Chrome plate piston
- 3.Option: rubber wheel,Polyurethane wheel
double(Nylon,polyurethane) wheel

Model		CBY20-III	CBY25-III	CBY30-III
Load capacity	kg	2000	2500	3000
Lift height	mm	190/200		
Min. Height	mm	75/85		
Outside fork spread	mm	520/540/685		
Fork length	mm	800/900/1000/1100/1150/1220		
Overall length	mm	1230/1330/1430/1530/1580/1650		
Steering Wheel	mm	Φ180×50/Φ200×50		
Load wheel	mm	Φ80×70/Φ74×70		
Turning radius	mm	1250		
Standard wheel	mm	single Nylon wheel		

Note : We can supply Low Profile Pallet Truck

