




LOWER ORDER PICKER

- ◎ MEC Series, rated load capacity: 2000kg
- ◎ Lifting height: 120mm
- Narrow aisles design

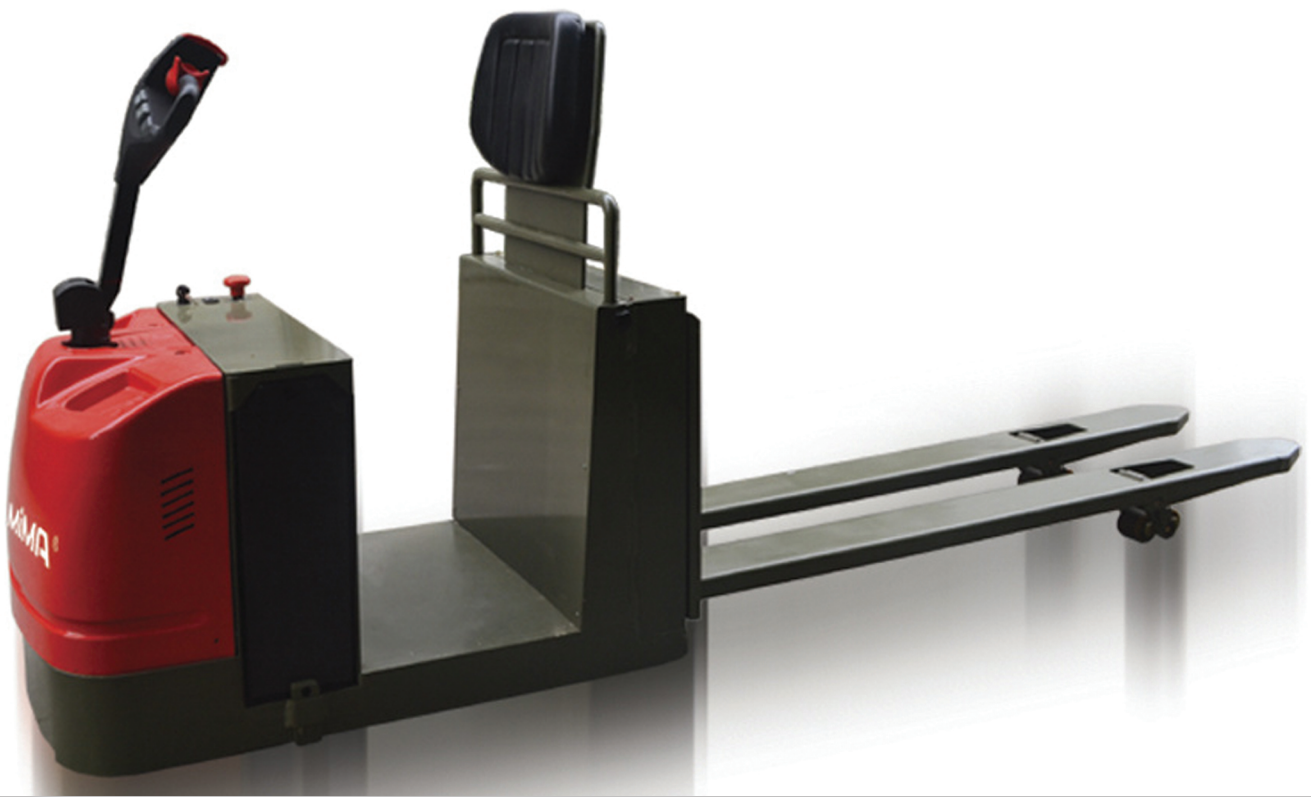

NAMI[®] PT DYNAMI MAKMUR LESTARI
<http://www.nami.co.id>

Office:

Jl. Petojo Utara VII No. 13C
Jakarta 10130
INDONESIA
T: +62-21-631 7818 (Hunting)
F: +62-21-631 7819

Workshop and Warehouse:

Jl. Raya Bekasi Km 23 No. 62
Cakung, Jakarta 13950
INDONESIA
T: +62-21-4682 1608 (Hunting)
F: +62-21-4682 1049

MiMA®米玛® 产品信息表

PRODUCT SPECIFICATION

Standard			
1.1	Brand		MIMA
1.2	Model		MEC20
1.3	Power type		Battery
1.4	Operation type		Stand-on
1.5	Loading capacity	picker	2000
1.6	Loading center	C (mm)	600
Tire、 Rim			
2.1	Tire type front/rear		PU/PU
2.2	Front wheel		Φ 215×75
2.4	Driving wheel		Φ 80×70
2.5	Balance wheel		Φ 100×40
2.6	Wheel quantity Front/Rear(X=driving)		1X+2 / 4
Dimension			
3.1	Backrest height	h1 (mm)	1406
3.2	Lifting height	h2 (mm)	120
3.3	Min. height	h3 (mm)	85
3.4	Overall length	l1 (mm)	2461
3.5	Overall length(without forks)	l2 (mm)	1311
3.6	Wheel-base	y (mm)	2117
3.7	Overall width	b1 (mm)	730
3.8	Fork size	l/e/s (mm)	1150×175×75
3.9	Fork spread	b5 (mm)	540
3.10	Aisle(1200×1000 pallet)	Ast (mm)	3050
3.11	Turning radius	Wa (mm)	2300
Function			
4.1	Driving speed load/unload	km/h	4.6/5.6
4.2	Lifting speed load/unload	mm/s	26/34
4.3	Lowering speed load/unload	mm/s	/
4.4	Grade ability(S2 5) load/unload	%	6/10
Power			
5.1	Driving motor type		AC/DC
5.2	Driving motor power(S2 60)	kw	1.5/1.2
5.3	Lifting motor type		DC
5.4	Lifitng motor power(S3 15%)	kw	2.2
5.5	Battery V/AH	V/Ah	24/210
Weight			
6.1	Battery weight	kg	200
6.2	Total weight(include battery)	kg	900
Steering、Braking			
7.1	Steering type		Manual
7.2	Service brake type		Electromagnetism
7.3	Service brake		Handle
7.4	Parking brake type		Electromagnetism