

AC Double Driving

3-Supporting Counterbalance Electric Forklift

TK20C



Standard

1, 1	Brand		MIMA
1, 2	Model		TK20C-35
1, 3	Power type		Battery
1, 4	Operation type		Seat
1, 5	Loading capacity	Q (kg)	2000
1, 6	Loading center	C (mm)	500

Tire、Rim

2, 1	Tire type front/rear		Solid/Solid
2, 2	Front wheel		200/50-10
2, 3	Driving wheel		15×4. 5-8
2, 4	Wheel quantity Front/Rear(X=driving)		2X / 2

Dimension

3, 1	Mast tilting front/rear	$\alpha / \beta (^{\circ})$	6/6
3, 2	Lifting height	h3 (mm)	3500
3, 3	Free lifting height	h2 (mm)	140
3, 4	Mast height(closed)	h1 (mm)	2145
3, 5	Mast height(open)	h4 (mm)	4530
3, 7	Overhead guard height	h6 (mm)	2000
3, 8	Distance from seat to ground	h7 (mm)	1055
3, 9	Under-clearance (mast)	m1 (mm)	90
3, 10	Min. under-clearance (frame)	m2 (mm)	100
3, 11	Overall length	l1 (mm)	3090
3, 12	Distance to forks back	l2 (mm)	2020
3, 13	Wheelbase	y (mm)	1480
3, 14	Forward Overhang	x (mm)	345
3, 15	Overall width	b1 (mm)	1250/1090
3, 16	Wheeltrack front/rear	b10/b11 (mm)	1050/180
3, 17	Fork size	l/e/s (mm)	1070×100×35
3, 18	Fork spread	b3 (mm)	220~1000
3, 19	Aisle(1000×1200 pallet)	Ast (mm)	3350
3, 21	Turning radius	Wa (mm)	1660

Function

4, 1	Driving speed load/unload	km/h	12/13
4, 2	Grade ability	%	10/12

Power

5, 1	Driving motor type		AC
5, 2	Driving motor power(S2 60)	kw	4. 8×2
5, 3	Lifting motor type		AC
5, 4	Lifting motor power(S3 15%)	kw	8, 6
5, 5	Battery V/Ah	V/Ah	48/490

Weight

6, 1	Battery weight	kg	770
------	----------------	----	-----

AC Double Driving


3-Supporting Counterbalance Electric Forklift

TK20C



6.2	Total weight(inclue battery)	kg	3200
Steering、Braking			
7.1	Steering type		EPS
7.2	Service brake		Hydraulic-type
7.3	Service type		Foot
7.4	Parking brake		Hand
Other			
8.1			
8.2			

负荷曲线图
CAPACITY CHART

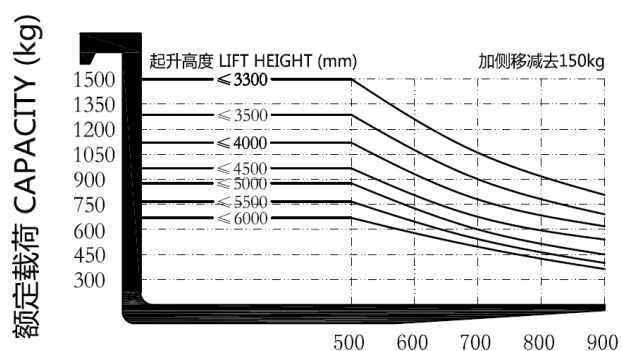

载荷中心 LOAD CENTER(mm) TK315

负荷曲线图
CAPACITY CHART

